

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
STENCIL THICKNESS 0.10mm

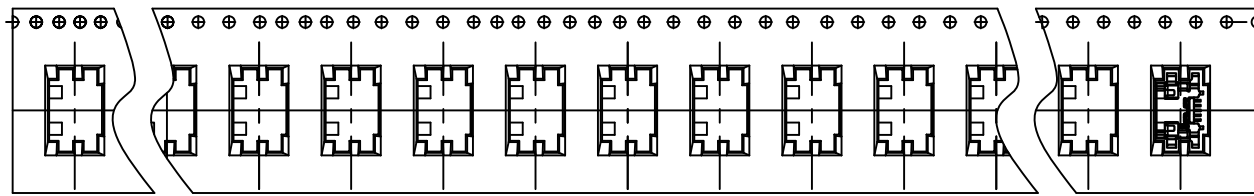
CONTACT NO.	SIGNAL NO.
1	VBUS
2	D-
3	D+
4	ID
5	GND
SHELL	SHIELD

- NOTES:
- MATERIAL:
HOUSING: LCP.
CONTACT: COPPER ALLOY.
SHELL: STAINLESS STEEL.
 - FINISH:
SEE NOTE
 - PRODUCT SPECIFICATIONS:
3-1 Voltage: 12V AC
3-2 Current: 3A.
3-3 OPERATION TEMPERATURE: -45° TO +85°
3-4 STORAGE TEMPERATURE: -45° TO +85°
 - ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC.
 - GP PASSED ACCORD WITH HRD-RoHS-219 STANDARD.
 - ALL DIMENSIONS MARKER (XX) MUST BE MEASURE BY FAI.

DESCRIPTION	MATERIAL	FINISH	Q' TY
SHELL	STAINLESS STEEL	1u" AU MIN SOLDER AREA 50u" NI MIN UNDER PLATED OVERALL	1
CONTACT	COPPER ALLOY	30u" AU MIN ON CONTACT MATTE PURE SN 120u" MIN PLATED ON SOLDER AREA 50u" NI MIN UNDER PLATED OVERALL	5
HOUSING	LCP, BLACK, UL 94V-0		1

REV.	ECN NO.	DESCRIPTION	DATE	REV.	FINISH:	UNITS:	GENERAL TOLERANCE	DRAW:	PART NO:
A		NEW	08/15/2017	A	SEE NOTE	mm	X. ±0.30 .X ±0.20 .XX ±0.10 .XX ±0.05	X.° ±2.00° .X° ±1.00° .XX° ±0.50°	U56-AB05D250
					SEE NOTE			CHECKED:	TITLE: MICRO USB 5PIN 板上1.15mm 全插---直边
					SEE NOTE			APPROVE:	DRAWING NO:

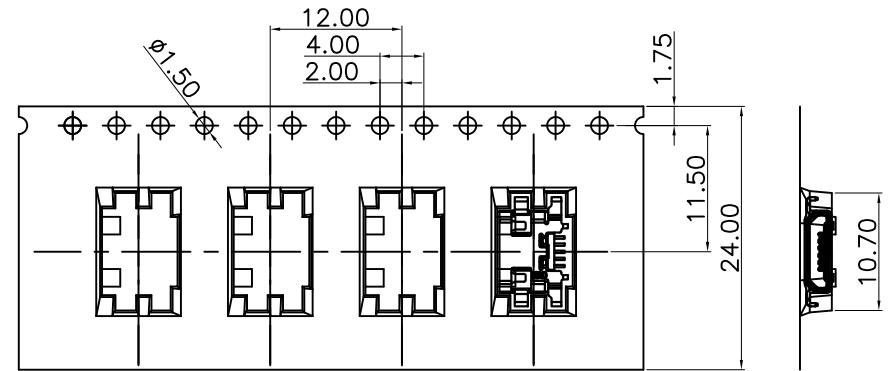
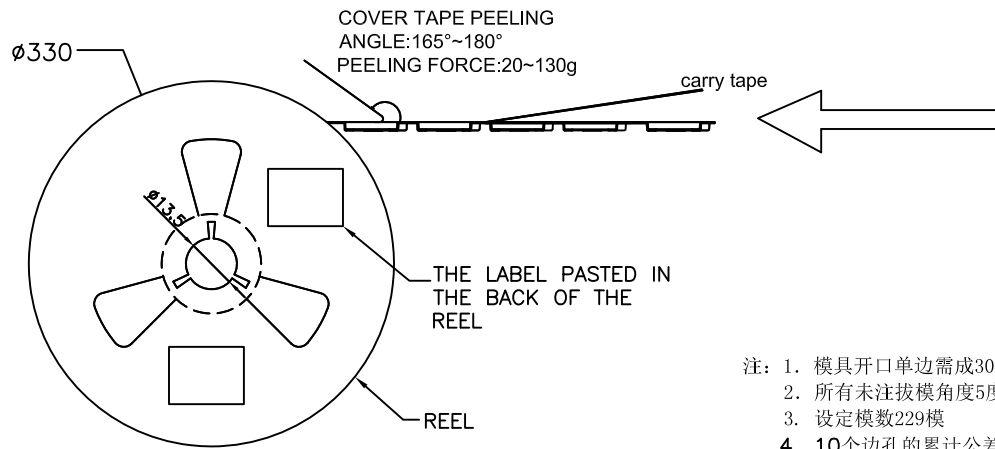

昆山捷皇电子精密科技有限公司
 HONGRIDA ELECTRONIC TECHNOLOGY CO., LTD.



16PSC EMPTY CARRIER TAPE


PACKING Q'TY:1800PCS

16PSC EMPTY CARRIER TAPE



- 注: 1. 模具开口单边需成30度 / 深0.50mm的倒角
2. 所有未注拔模角度5度
3. 设定模数229模
4. 10个边孔的累计公差不能超过±0.2mm.
5. 材料规格: PS 透明防静电, 厚度 0.30mm.
6. 13英寸卷轮卷装长度:19.584米.
7. 13英寸卷轮包装零件总颗数:1600PCS.
8. 所有尺寸设计参照EIA-481-C-2003.
9. 载带在250mm长度以内最大弯曲度不超过1mm.

U56-AB05D250	1800PCS	12	21600	350*350*390
PART NO.	Q'TY/REEL	REEL/GARTON	Q'TY/CARTON	CATTON SIZE

				UNITS: mm	GENERAL TOLERANCE		DRAW:	PART NO: U56-AB05D250
				DATE: 08/15/17	X. ±0.30 .X ±0.20 .XX ±0.10	X.' ±2.00' .X' ±1.00' .XX' ±0.50'	CHECKED:	TITLE: MICRO USB 5PIN 板上1.15mm 全插--直边
				SCALE: 1/1	MATERIAL: SEE NOTE		APPROVE:	DRAWING NO:
A		NEW	08/15/17	SHEET: 2/2	FINISH: SEE NOTE		 昆山捷皇电子精密科技有限公司 HONGRIDA TECHNOLOGY CO.,LTD.	
REV.	ECN NO.	DESCRIPTION	DATE	REV. A				