

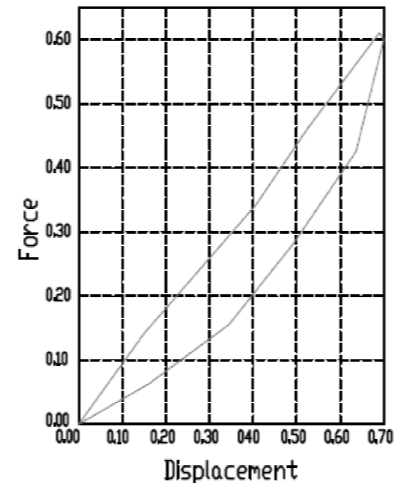


RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05

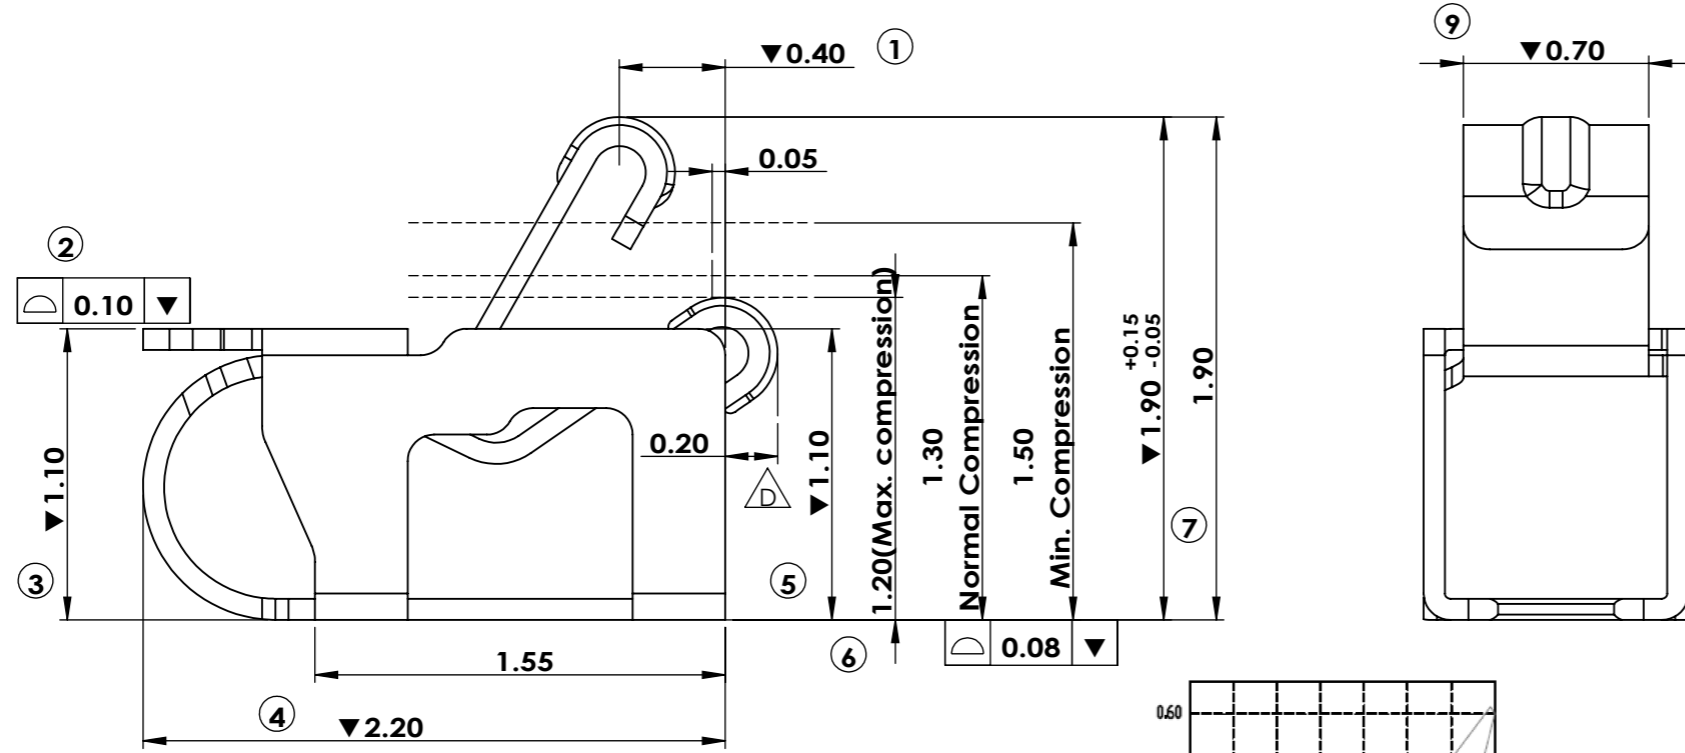

- NOTES:
- MATERIAL: SUS301-H T=0.08±0.01mm
 - FINISH: 50~150 u" Nicker on over all
1u" Min Au Plating on contact area
1u" Min Au Plating on solder area. \triangle
 - SPEDIFICATIONS:
 - Operating Temperature: -20 °C+65 °C
 - Spring Welding Force: 2.0 KG Min.
 - FORCE OF 1.50mm: 0.30N MIN PER CONTACT.
 - RF Performance:
 - Impedance: 50 OHM
 - Vswr: 1.5 max. (DC-3GHz)
 - Insertion Loss: 0.6dB max (DC-3GHz)
 - Durability: 1500 Cycles
 - Packing Specification: Reel&Tape
 - Salt spray : 48HRS
 - ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC.

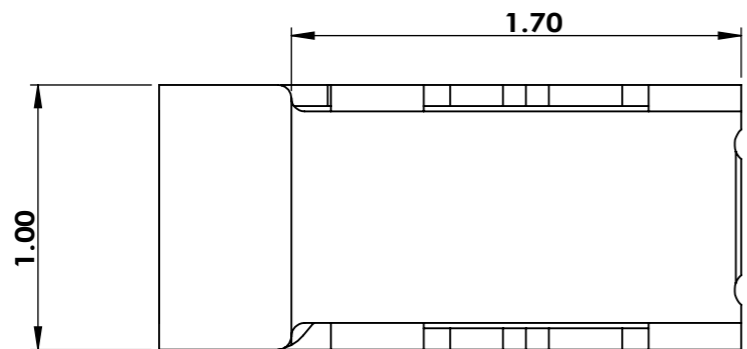

E	E2009006R	修改电镀区域	09/28/2020	UNITS: mm	GENERAL TOLERANCE		DRAW:	PART NO: P35-AB01F190
D	E17102704A	MOD NOTE	10/27/2017	DATE: 12/20/2016	X. ±0.25	X.° ±2.00°	CHECKED:	TITLE: 1.9 H 天线弹片
C	E1709040A	增加正向力	09/04/2017	SCALE: 35:1	.X ±0.15	.X° ±1.00°	APPROVE:	DRAWING NO:
B	E1703007A	图与实物不符, 更正图	03/31/2017	SHEET: 1 / 1	.XX ±0.10	.XX° ±0.50°	鸿日达科技股份有限公司 HONGRIDA ELECTRONIC TECHNOLOGY CO.,LTD.	
REV.	ECN NO.	DESCRIPTION	DATE	REV. C	FINISH: SEE NOTE			