
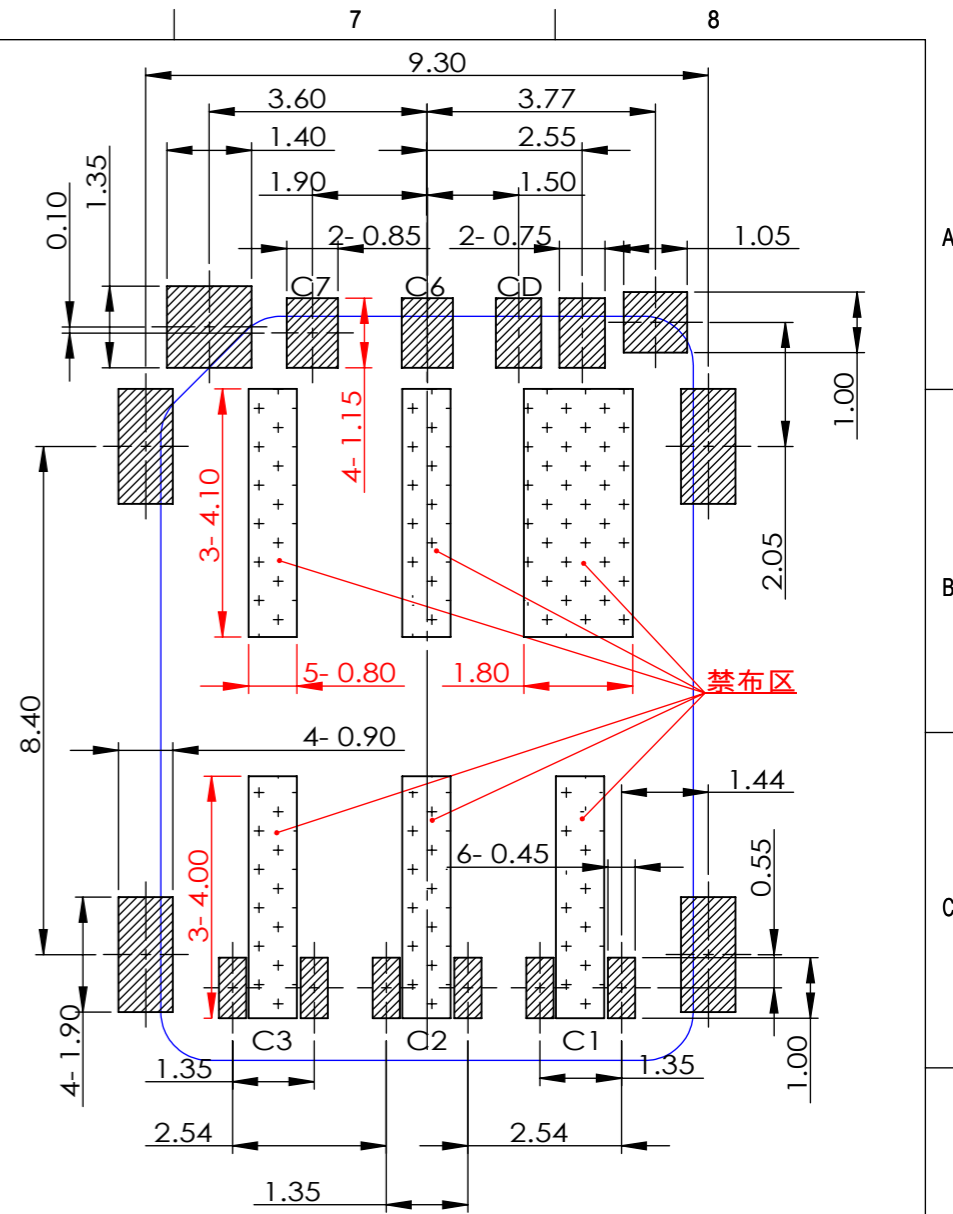
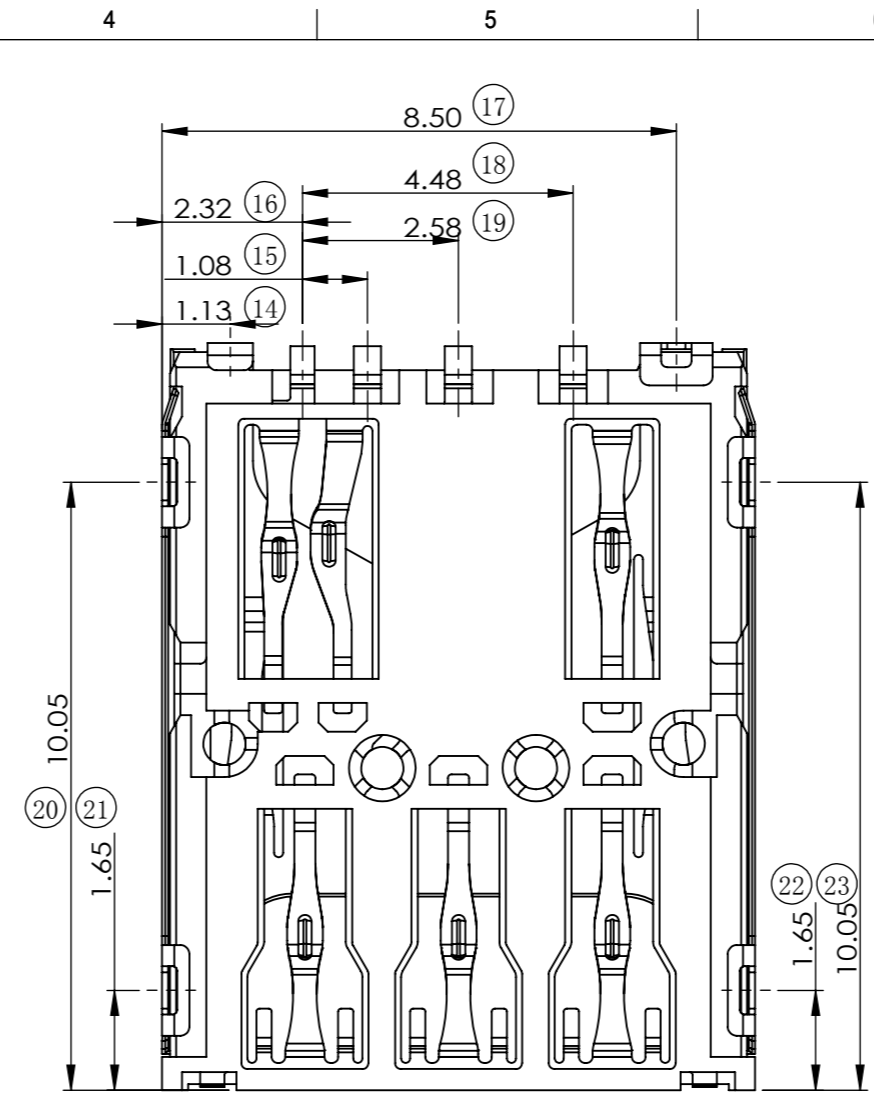


NOTES:

- MATERIAL:
HOUSING: LCP, BLACK, UL 94V-0
CONTACT: C5210, T=0.08MM
SHELL: SUS304, T=0.10MM
- FINISH:
CONTACT: NI 50u"min PLATING OVER ALL,
Au 1u" ON THE CONTACT AREA
Au 1u" ON THE SOLDER AREA
SHELL: SELECTIVE GOLD FLASH IN SOLDER TAIL AREA
NI 50u"min PLATING OVER ALL
- GP PASSED ACCORD WITH HRD-RoHS-219 STANDARD.
- ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED EVERYDAY BY QC.
- ALL DIMENSIONS MARKED (XX) MUST BE CONTROLLED BY QC.
- RATED PARAMETERS OF CONNECTOR
6-1. Operating temperature: -40° C to 70° C
6-2. Rated Current: 0.5A
6-3. Rated Voltage: 30V AC/DC Per Contact
6-4. Contact Resistance: 100m Ω MAX

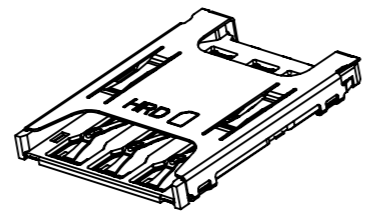

PIIN/NO.	ASSIGNMENT
C1	Vcc(SUPPLY VOLTAGE)
C2	RST(RESET 0.40)
C3	CLK (CLOCK SIGNAL)
CD	DETECT SWITCH
C5	GND
C6	Vpp (VARIABLE SUPPLY BOLTAGE)
C7	I/O (DATA INPUT/OUTPUT)

CARD INSERTION CONDITION	CARD DETECT SWITCH	CIRCUIT CD C5
WITHOUT CARD	OPEN	
CARD INSERTION	CLOSE	

REV.	ECN NO.	DESCRIPTION	DATE	REV.	FINISH:	SEE NOTE	UNITS:	mm	GENERAL TOLERANCE	DRAW:	PART NO:
A	E1905253A	发行新版本	05/31/2019	B	客户图				X. ±0.20 .X ±0.15 .XX ±0.10 .XXX ±0.05		S126-5B06F13A
									X.° ±2.00° .X° ±1.00° .XX° ±0.50° .XXX° ±0.10°	CHECKED:	NAME: 1.35H NANO SIM CARD CONN.
									SCALE: 8/1 .XXX ±0.05	APPROVE:	DRAWING NO: C-S126-0005
									SHEET: 1/1		

昆山捷皇电子精密科技有限公司
HONGRIDA ELECTRONIC TECHNOLOGY CO.,LTD.